04 - Window Schedule

Level	Ref.	To Room: Name	Sill Height	Head Height	Width	Height	Material	Window frame finish	U Value	YMD Window Comments
GA Ground Floor Level	NW 01	Classroom 1	0	2175	4285	2175	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Louvre as Elevation. Opening as indicated on Elevation
GA Ground Floor Level	NW 02	Classroom 1	0	2175	3048	2175	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Louvre as Elevation. Opening as indicated on Elevation
GA Ground Floor Level	NW 03	Classroom 2	0	2175	3048	2175	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Louvre as Elevations. Opening as indicated on Elevation.
GA Ground Floor Level	NW 04	Classroom 2	0	2175	4285	2175	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Louvre as Elevation. Opening as indicated on Elevation
GA Ground Floor Level	NW 05	Therapy Multi Use Room	0	2175	1248	2175	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Opening as indicated on Elevation
Level 1 - GA First Floor Level	NW 06	Sensory Room	640	2590	1248	1950	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Opening as indicated on Elevation
Level 1 - GA First Floor Level	NW 07	Classroom 3	640	2590	4285	1950	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Louvre as Elevation. Opening as indicated on Elevation
Level 1 - GA First Floor Level	NW 08	Classroom 3	640	2590	3048	1950	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Louvre as Elevations. Opening as indicated on Elevation.
Level 1 - GA First Floor Level	NW 09	Classroom 4	640	2590	3048	1950	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Louvre as Elevations. Opening as indicated on Elevation.
Level 1 - GA First Floor Level	NW 10	Classroom 4	640	2590	4285	1950	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Louvre as Elevation. Opening as indicated on Elevation
Level 1 - GA First Floor Level	NW 11	Meeting / Office	640	2590	1248	1950	PPC Aluminium	RAL Colour To match existing	1.4 W/m2k	Opening as indicated on Elevation

GENERAL NOTES:

All glazing to comply with BS 8213-4:2016 Windows and doors. Code of practice for the survey and installation of windows and external doorsets.

All windows to comply with the following BS Standards - BS 6375-1 (weathertightness), BS 6375-2 (durability), & BS EN 12207, Class 2 (air permeability).

Glazing to achieve U-value of 1.4W/m2K (overall) in accordance with BRE Report 443.

All glazing to have external coloured frame:- RAL 7016 (TBC) to match existing. Glazing supplier to inspect & confirm exact match.

Internal coloured frame to be RAL 9010 White.

All glazing to be in accordance with approved document K.

All opening lights to be on restrictor stays with max 100mm opening to achieve compliance with the Approved document K5.1 Section 6.

All new windows to be fitted with trickle ventilators to provide sufficient background ventilation to comply with the building regulations

Glazing types to be confirmed by glazers to match required standards & subject to sheet size minimum thickness requirements.

Spandrel panels:- Panels to comply with overall glazing U-value.
Colour RAL 7016 (TBC) to match existing. Glazing supplier to inspect & confirm exact match.

Teleflex manual windows winders to all high-level windows. To include for chain openers, fixings plates, Midi operator, conduit, inner cable, conduit clips, end caps etc)

All sizes shown are design intent and show overall opening size. Glazing sub-contractor to allow for any required tolerances and provide architect with full set of drawings for sign off. Subcontractor to measure all formed openings before manufacture to allow for any irregularities in the structure.

Lintels:- Structural engineer to confirm lintel specification.
Lintels to have a bearing of 150mm to each side of opening for lintels <3000mm overall length. Lintels to have a bearing of 300mm to each side of opening for lintels > 3000mm overall length.

DO NOT SCALE FROM THIS DRAWING EXCEPT FOR PLANNING PURPOSES ONLY
Copyright reserved

This drawing is issued for the sole & exclusive use of the named recipient. Distribution to any third party is on the strict understanding that no liability is accepted by YMD Boon Ltd for any discrepancies, errors or omissions that may be present & no guarantee is offered as to the accuracy of information shown.
All dimensions to be checked on site & any discrepancies found shall be brought to the attention of YMD Boon Ltd prior to commencement of any building works.

THIS DRAWING IS TO BE READ IN COLOUR PRINT

CDM - RESIDUAL RISKS
The following are considered to be significant risks relevant to this drawing, which could not be fully mitigated or removed through design. Further possible control measures have been identified within the Design Risk Assessments which may help to mitigate these and other identified risks further during the construction / maintenance process.

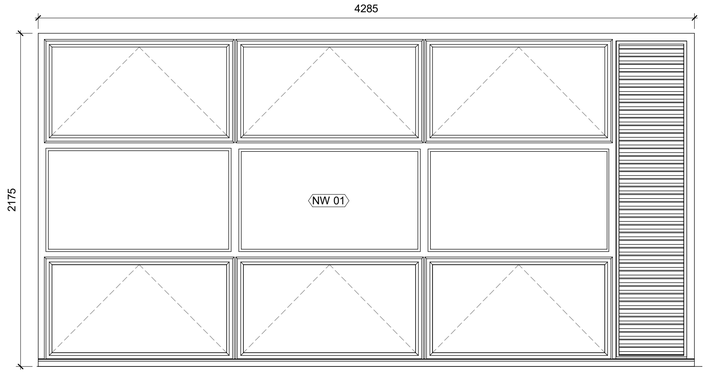

1 **West - NW 01 Elevation**
1 : 20

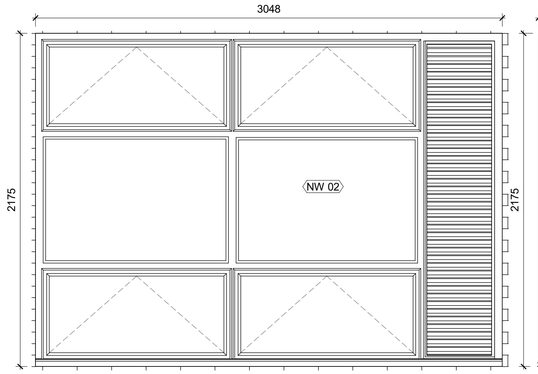

2 **North - GF -NW 02 Elevation**
1 : 20

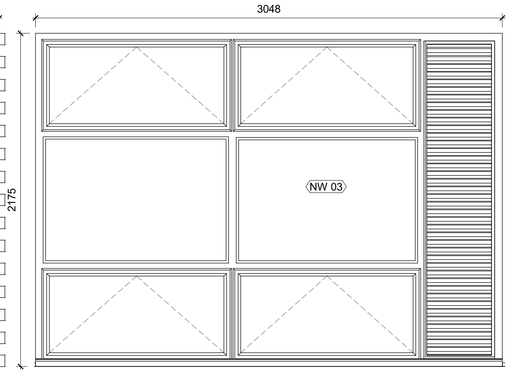

3 **North - GF -NW 03 Elevation**
1 : 20

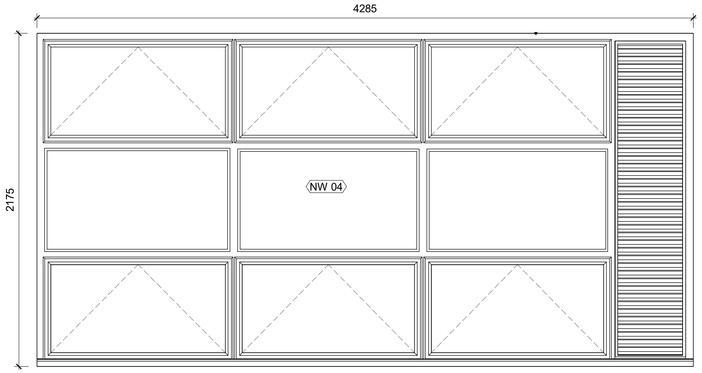

4 **East - GF - NW 04 Elevation**
1 : 20

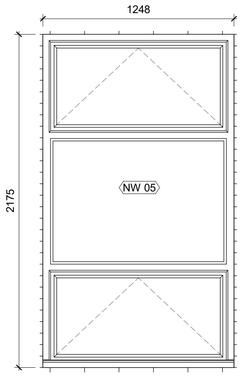

5 **East - GF - NW 05 Elevation**
1 : 20



6 **West - FF - NW 06 Elevation**
1 : 20

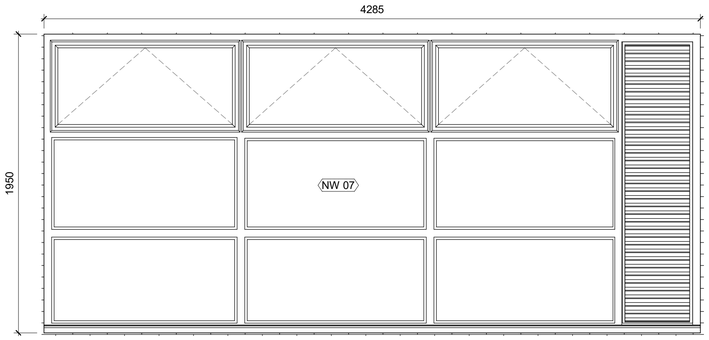

7 **West - FF - NW 07 Elevation**
1 : 20

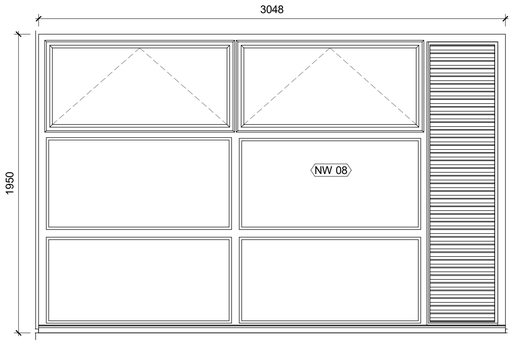

8 **North - FF - NW 08 Elevation**
1 : 20

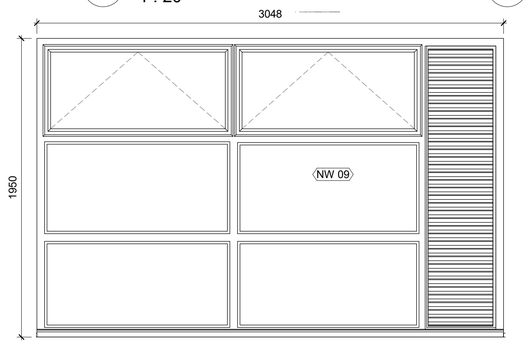

9 **North - FF - NW 09 Elevation**
1 : 20

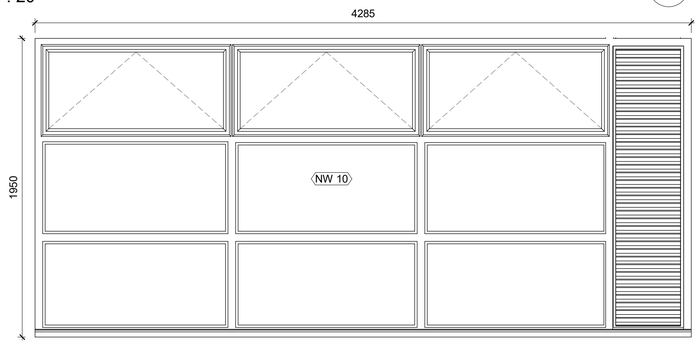

10 **East - FF - NW 10 Elevation**
1 : 20



11 **East - FF - NW 11 Elevation**
1 : 20

500mm 2m

Rev		Date	Drawn	Chk'd
C01	Construction Issue	19.07.24	SK	KR

CONSTRUCTION

ymd boon Architects & Construction Consultants

6b Anson House, Compass Point Business Park
Market Harborough, LE16 9HW
Ground Floor, Loxley House, Tottle Road, Nottingham, NG2 1RT
Oak House Buisness Centre, Waterside South, Lincoln, LN5 7FB

Client
Harrow Council

Project
Shaftesbury High School

Scale	Date	Drawn
1 : 20 @A1	**June '23**	**SPD**
Drawing Title: **Window Schedule**		Checked: **SS**

Drawing Number	Status	Revision
J4715-YMD-01-XX-DR-A-8000	**S3**	**C01**